



BC20 | BC30 | BC40 | BC60


# Hardmount Washer-Extractor

## FEATURES

- Rigid mounted, medium spin, 200G factor
- Stainless steel top and front panel Stainless steel drum and tub
- High capacity water inlets
- Large drain valve
- Large door opening for easy loading & unloading
- Industry-leading flexible water level settings
- Patented Fill and Drain leak detection saves water
- Lighter, computer-optimized frame Designed to reduce sound and vibration levels

## CONTROLS OPTIONS

- Available with EVOLIS Touch for Vend. 7", full color touch screen display with swipe function: very intuitive for users User-friendly screen with operating
- Instructions built in as part of the control Complete control content available in 34 languages
- Wireless communication enabling programming & firmware updates through cloud
- Automated service reminders remind users to maintenance tasks
- IPSO Connect: interactive dashboard offers operational performance info on mobile device
- 15 easy-to-use washer cycle modifier

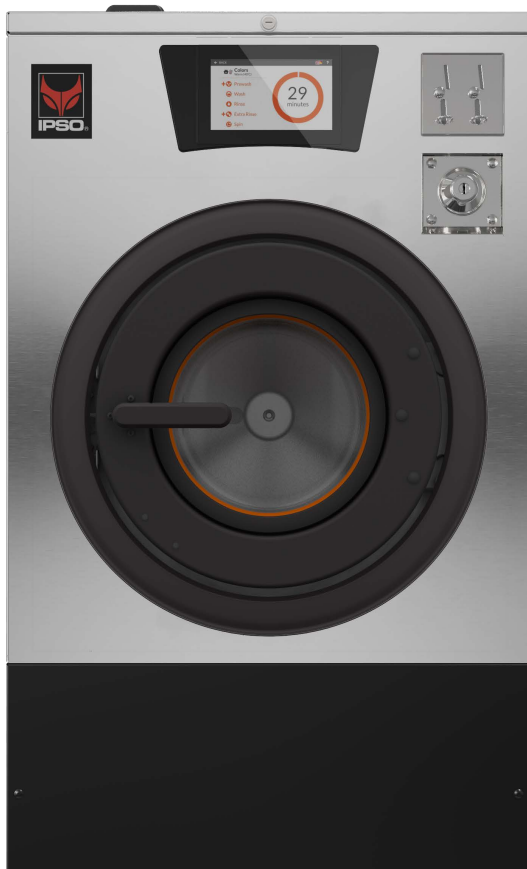

Robust Design



Large Drain Valve



Large Door Opening



Low Water Consumption

|                                   |                               | BC20                           | BC30                           | BC40                           | BC60                            |
|-----------------------------------|-------------------------------|--------------------------------|--------------------------------|--------------------------------|---------------------------------|
| Control Option                    |                               | EVOLIS Touch                   | EVOLIS Touch                   | EVOLIS Touch                   | EVOLIS Touch                    |
| Capacity                          | kg (lb)                       | 9.1 (20)                       | 13.1 (30)                      | 18.1 (40)                      | 27.2 (60)                       |
| Overall Width                     | mm (in)                       | 660 (26)                       | 737 (29)                       | 778 (30.6)                     | 865 (34.1)                      |
| Overall Depth                     | mm (in)                       | 784 (30.9)                     | 896 (35.3)                     | 1073 (42.3)                    | 1135 (44.7)                     |
| Overall Height                    | mm (in)                       | 1092 (43)                      | 1143 (45)                      | 1199 (47.2)                    | 1267 (49.9)                     |
| Cylinder Diameter                 | mm (in)                       | 533 (21)                       | 610 (24)                       | 668 (26.3)                     | 762 (30)                        |
| Cylinder Depth                    | mm (in)                       | 350 (13.8)                     | 406 (16)                       | 515 (20.3)                     | 559 (22)                        |
| Cylinder Volume                   | l (cu. ft.)                   | 79.3 (2.8)                     | 119 (4.2)                      | 178 (6.3)                      | 255 (9.0)                       |
| Door Opening Size                 | mm (in)                       | 295 (11.6)                     | 363 (14.3)                     | 414 (16.3)                     | 414 (16.3)                      |
| Door Bottom to Floor              | mm (in)                       | 365 (14.4)                     | 356 (14)                       | 370 (14.6)                     | 379 (14.9)                      |
| Water Inlet Connection            | mm (in)                       | 2 @ 19 (0,75)                  | 2 @ 19 (0,75)                  | 2 @ 19 (0,75)                  | 4 @ 19 (0,75)                   |
| Drain Diameter                    | mm (in)                       | 1 @ 76 (3)                     | 1 @ 76 (3)                     | 1 @ 76 (3)                     | 1 @ 76 (3)                      |
| Drain Height to Floor             | mm (in)                       | 99 (3,9)                       | 109 (4,3)                      | 114 (4,5)                      | 124 (4,9)                       |
| Total #of Speeds                  |                               | 9                              | 9                              | 9                              | 9                               |
| CYLINDER SPEEDS                   | [RPM (G-FORCE)]<br>Ultra High | 819(200)                       | 766(200)                       | 733(200)                       | 686(200)                        |
| VOLTAGE WIRES/ CIRCUIT<br>BREAKER |                               |                                |                                |                                |                                 |
| FLA120/60/1                       |                               | 15.IX                          | N/A                            | 20 – 15                        | N/A                             |
| 200-208/220-240/50/60/3/1/3       |                               | 15 – 4 (1 Ph)<br>15 – 3 (3 Ph) | 15 – 7 (1 Ph)<br>15 – 4 (3 Ph) | 15 – 7 (1 Ph)<br>15 – 4 (3 Ph) | 15 – 11 (1 Ph)<br>15 – 7 (3 Ph) |
| 200-208/220- 240/50/60/3/3        |                               | 30 – 22                        | 30-22                          | 50 – 41                        | 50 – 41                         |
| 440-480/50/60/3/3                 |                               | 15 – 2                         | 15 – 3                         | 15 – 3                         | 15 – 4                          |
| 380-415/50/60/3/3                 |                               | 15 – 4                         | 15 – 4                         | 15 – 5                         | 15 – 6                          |
| SHIPPING DIMENSIONS               |                               |                                |                                |                                |                                 |
| AP-PROX.                          | mm (in)                       |                                |                                |                                |                                 |
| Width                             | mm (in)                       | 711 (28)                       | 800 (31.5)                     | 826 (32.5)                     | 953 (37.5)                      |
| Depth                             | mm (in)                       | 859 (33.8)                     | 937 (38.3)                     | 1105 (43.5)                    | 1191 (46.9)                     |
| Height                            | mm (in)                       | 1255 (49.4)                    | 1303 (51.3)                    | 1361 (53.6)                    | 1430 (56.3)                     |
| Motor Power Consumption           | [kW (HP)]                     | 0.75 (1)                       | 0.75 (1)                       | 1.5 (2)                        | 2.2 (3)                         |
| Net Weight                        | kg (lb)                       | 154 (340)                      | 200 (440)                      | 245 (540)                      | 308 (680)                       |
| Shipping Weight                   | kg (lb)                       | 172 (380)                      | 218 (480)                      | 263 (580)                      | 327 (720)                       |
| Slat Crate Shipping Weight        | kg (lb)                       | 209 (460)                      | 263 (580)                      | 308 (680)                      | 381 (840)                       |
| Agency Approvals                  |                               | CSA/UL/IEC/KTL                 | CSA/UL/IEC/KTLL                | CSA/UL/IEC/KTL                 | CSA/UL/IEC/KTL                  |

|      | Height | Width | Depth |
|------|--------|-------|-------|
| BC20 | 1092   | 660   | 784   |
| BC30 | 1143   | 737   | 896   |
| BC40 | 1199   | 778   | 1073  |
| BC60 | 1267   | 866   | 1135  |

All measurements in mm.

