



# STACKED WASHER EXTRACTOR/ TUMBLE DRYER


**BSG30**   **BSG50**  
2×30 lb (13 kg)   2×50 lb (25 kg)

## FEATURES

- Ideal for limited space settings
- Increases wash capacity
- Improves throughput
- Minimal front fasteners give quick access to key washer-extractor components to improve serviceability
- Supports a higher volume than typical retail and light commercial products are able to support
- More than double production with higher capacity and faster wash times
- Reliability and durability that drastically outperforms retail or light commercial options
- IPSO stacked washer-extractor/tumble dryer is a unique product that truly delivers increased productivity. Featuring the Evolis Touch Control.

## EVOLIS CONTROL

- Available with EVOLIS touch control for Vend.
- 7", full color touch screen display with swipe function: very intuitive for users
- User-friendly screen with operating instructions built in as part of the control
- Complete control content available in 34 languages
- Wireless communication enabling programming & firmware updates through cloud
- Automated service reminders remind users to maintenance tasks
- Warranty IPSO Connect: interactive dashboard offers operational performance info on mobile device

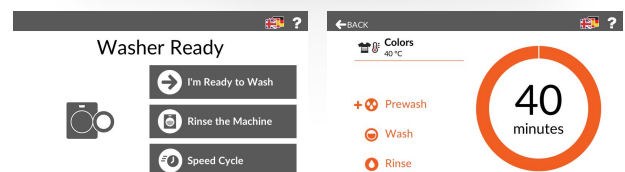

EVOLIS Touch Control

IPSO is a division of Alliance Laundry Systems. Based in Ripon, Wis., USA and Wevelgem Belgium, Alliance is the world's leading manufacturer of commercial laundry equipment. Learn more at [alliancelaudry.com](http://alliancelaudry.com)

## STACKED WASHER EXTRACTOR/TUMBLE DRYER

Specifications	BSG30		BSG50			
	Washer-Extractor	Tumble Dryer	Washer-Extractor	Tumble Dryer		
Control Option	EVOLIS Touch		EVOLIS Touch			
Capacity - lb (kg)	30 (13) x 2		50 (25) x 2			
Overall Width - in (mm)	31.4 (797)		34.4 (875)			
Overall Depth - in (mm)	45.5 (1152)		51.3 (1302)			
Overall Height - in (mm)	79.7 (2023)		84.3 (2141)			
Cylinder Diameter - in (mm)	24.0 (610)	30.0 (762)	26.3 (668)	33.0 (838)		
Cylinder Depth - in (mm)	16.0 (406)	26.0 (660)	20.3 (515)	30.0 (762)		
Cylinder Volume - cu. ft (liters)	4.2 (119)	10.6 (300)	6.3 (178)	14.8 (419)		
Reversing Cylinder	-	Standard	-	Standard		
Door Opening Size - in (mm)	14.3 (363)	22.6 (574)	16.3 (414)	26.9 (683)		
Door Bottom to Floor - in (mm)	14.0 (356)	51.3 (1303)	14.6 (370)	52.3 (1328)		
Water Inlet Connection - in (mm)	2 x 0.75 (19)	-	2 x 0.75 (19)	-		
Drain Diameter - in (mm)	1 x 3 (76)	-	1 x 3 (76)	-		
Drain Height to Floor - in (mm)	4.3 (108)	-	4.5 (115)	-		
Heat Input Power - Btu/hr (kW, Mj/hr.)	-	73,000 (21.4, 77.0)	-	95,000 (27.8, 100)		
Gas Connection - in	-	1/2 NPT	-	1/2 NPT		
Air Outlet - in (mm)	-	8.0 (200) Elliptical	-	10.0 (250) Elliptical		
Airflow - cfm (l/sec)	-	400 (190)	-	600 (285)		
Motor - HP (kW)	Fan	-	0.5 (0.4)	-		
	Drive	1 (0.75)	0.3 (0.2)	2 (1.5)		
Total # of Speeds	6	-	6	-		
Cylinder Speeds - RPM (G-Force)	Gentle	34 (0.4)	-	33 (0.4)	-	
	Wash	48 (0.8)	-	46 (0.8)	-	
	Distribution	86 (2.5)	-	82 (2.5)	-	
	Very Low	282 (27)	-	269 (27)	-	
	Low	485 (80)	-	464 (80)	-	
	Medium	542 (100)	-	518 (100)	-	
Electrical Specs - amps	Gas	200-240V/50/60/1/3	15	10	15	10
	X					
Shipping Dimensions Approx. - in (mm)	Width	34.5 (876)		35.5 (902)		
	Depth	47.0 (1194)		54.0 (1372)		
	Height	83.0 (2108)		89.0 (2261)		
Net Weight - lb (kg)	770 (349)		910 (413)			
Shipping Weight - lb (kg)	787 (357)		930 (422)			
Agency Approvals	CSA/UL/IEC/KTL/KGS		CSA/UL/IEC/KTL/KGS			